


## PRODUCT INFORMATION



QUIKRETE® is a registered trademark of QUIKRETE® International, Inc.  
U.S. Trad. Off. Reg. Nos. 391,990; 767,396; 1,042,903  
© 2005 Quikrete International, Inc., Atlanta, GA 30305

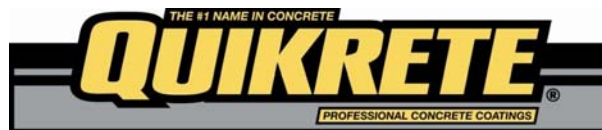

### PRODUCT: 02-50020 Series

#### DESCRIPTION:

QUIKRETE® Epoxy Garage Floor Coating Kit

**This is a 2 Component System - Mix "Part A" with "Part B" per instruction sheet before using!**

#### FEATURES:

This water-based two-component epoxy provides a coating 2X stronger than concrete for the toughest garage floor in one coat. This epoxy is fortified with new, heavy-duty resin technology to provide superior durability. It beautifies and protects with a durable finish that protects against damage from hot tires, gasoline, oil, scuffs, wear and tear. Note: Do not apply this product over painted surfaces or surfaces which have been treated with sealers or damp or wet concrete!

#### TYPICAL PRODUCT PROPERTIES:

**(50020 Light Gray Kit – mixed components)**

VEHICLE TYPE:	Polyamide/Epoxy Resin
SOLIDS:	65% WT. 50% VOL.
VOC:	100 g/L max
WT/GAL:	10.8 lbs.
VISCOSITY:	90-95 KU
FLASHPOINT:	N.A.
60° GLOSS:	35-50 Units Semigloss

#### SURFACE PREPARATION:

See instructional DVD for detailed surface preparation instructions.

**General:** Surface must be clean, dry and free of dirt, grease, oil or other contaminants.

**Bare Concrete:** Allow 60 days minimum for new concrete surfaces to cure before painting. Clean and etch new or bare concrete with BOND•LOK™ Cleaner, Degreaser & Etcher. **Follow all BOND•LOK label instructions, including testing porosity of concrete.**

**Previously Painted or Stained Concrete:** Clean with an all-purpose cleaner (TSP or substitute) and dull glossy surfaces by sanding or using a chemical deglosser. Previously painted concrete may be repainted only if it has excellent adhesion to the floor. Test adhesion by pressing heavy duty tape (i.e. duct tape) at various places on the painted surface. Pull the tape quickly from the surface. If the previous paint is removed by the tape, the paint must be fully removed before using this product. **Allow floor to dry completely, at least 4 hours or overnight.**

#### COVERAGE/THINNING:

Covers approximately 250 sq. ft. (23.2 m<sup>2</sup>) per gallon. Do not thin.

**FILM THICKNESS:** 6 Mills Wet 2.4 Mills Dry

#### DRY TIMES:

Apply only when surface and air temperatures are 50-90°F (10-32°C). Dries to the touch in 8-12 hours, wait 12-24 hours for light foot traffic and to return tools and other items to garage, 72 hours for automobile traffic.

**02-50020 Series QUIKRETE Epoxy Garage Floor Coating Kit**

**IMPORTANT MIXING INSTRUCTIONS.**

Pour "Part B" into "Part A" and **mix thoroughly for 3 minutes.** Allow to stand 30 minutes. Mix again before applying. Use all paint within 2½ hours of initial mixing. Do not mix with other products or tinting colorants.

**APPLICATION:**

See instructional DVD for detailed application instructions. Use a premium quality medium nap (3/8") roller or polyester brush. Spread the paint uniformly and finish with long, even strokes. After each 2' x 6' section is painted, stop and apply the color flakes to wet epoxy, if desired. **Do not pond or puddle this product.**

**CLEAN UP:**

Clean up with warm, soapy water.

**PACKAGING:**

- 1 Gallon Kit\* Each
- Each Kit contains the following items to make 1 gallon of coating
  - ¾ Gallon 50020A series Epoxy
  - 1 Quart 50025B Hardener
  - 1 bottle 20 Series Color Flakes
  - 1 Quart 95 Bond•Lok Concentrate
  - 1 Instruction DVD
  - 1 Instruction Sheet
  - 1 Stirring Stick

**STORAGE AND DISPOSAL:**

Do not freeze! Keep container closed when not in use. Do not transfer contents to other containers for storage or disposal. In case of spillage, absorb with inert material such as sand or kitty litter. Dispose of contaminated absorbent, container and/or unused contents in accordance with local, state and federal regulations.

**Product Information Hotline:  
1-800-458-0047**

**CAUTION:**

**THE VARIOUS COMPONENTS OF THIS KIT CONTAIN THE FOLLOWING CHEMICALS THAT MAY BE HARMFUL IF MISUSED: EPOXY RESIN, CRYSTALLINE SILICA, ORGANIC SOLVENT AND ACID SALT. READ CAUTIONS ON THE INDIVIDUAL CONTAINERS CAREFULLY**

**FIRST AID:**

**EYE CONTACT:** Flush thoroughly with water for at least 15 minutes. If irritation persists, **get medical attention immediately.**  
**SKIN CONTACT:** Wash thoroughly with soap and water. Remove contaminated clothing and shoes. Wash clothing before reuse. Thoroughly clean contaminated shoes. If irritation persists, **get medical attention.**  
**IF INHALED:** If you experience difficulty in breathing, leave the area to obtain fresh air. If breathing difficulty continues, **get medical attention immediately.**  
**IF SWALLOWED:** Do not induce vomiting. **Get medical attention immediately.**

**DO NOT TAKE INTERNALLY.  
KEEP OUT OF REACH OF CHILDREN.  
For additional safety and chronic health hazard information, refer to the Material Safety Data Sheet for this product.  
EMERGENCY MEDICAL TELEPHONE:  
1-888-345-5732  
When components are mixed together, this epoxy kit contains less than 100 g/L (0.8 lb./gal) VOC**

**WARNING!** If you scrape, sand or remove old paint, you may release lead dust. **LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE.** Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to [www.epa.gov/lead](http://www.epa.gov/lead)

The data on this sheet represent typical values. Since application variables are a major factor in product performance, this information should serve only as a general guide. We assume no obligation or liability for use of this information. **UNLESS WE AGREE OTHERWISE IN WRITING, WE MAKE NO WARRANTIES, EXPRESS OR IMPLIED, AND DISCLAIM ALL IMPLIED WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR FREEDOM FROM PATENT INFRINGEMENT. WE WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.** Your only remedy for any defect in this product is the replacement of the defective product, or a refund of its purchase price, at our option.